
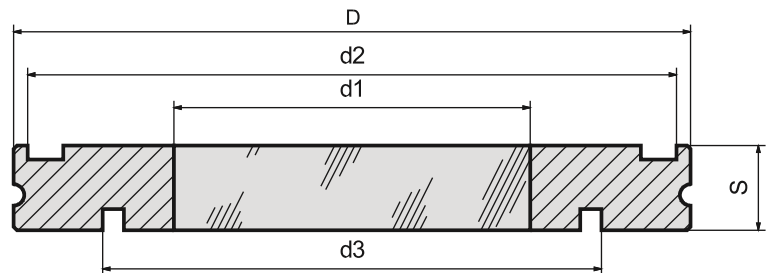


## Type 79.ISO-K

METAGLAS® ISO-K Sight Glasses

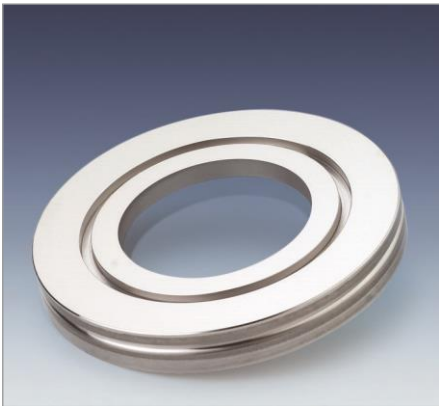

### Applications

- ISO-K – connections
- Ultra high vacuum

### Advantages

- Extremely compact construction
- Easy, instruction free installation
- Security against total failure
- Long working time
- Suitable for high vacuum and pressure

### Operating conditions

- Temperature: see table

### Technical data

Manufactured and tested to:

- Directive for pressure equipment 2014/68/EU, Module H (DIN/EN/ISO 9001)
- AD2000 Standards W0/TRD 100
- Sight glass fused to metal conforming to DIN 7079
- Materials to VdTÜV specifications and the DIN/EN designated standards
- Glass: Borosilicate to DIN 7080 / DIN 7079

### Material certificates

- Certificate of Conformity EN 10204 – 3.1 or 3.2 for extra costs

Ring materials    Operating temperature

1.4462	-30°C to +280°C
2.4602	-60°C to +300°C
2.4610	-60°C to +300°C

NW	D	d1	d2	d3	S
63	95	50	92	70	12
80	110	60	105	83	12
100	130	65	125	102	12
125	155	75	150	127	12
160	180	90	175	153	12
200	240	120	235	213	12
250	290	140	285	261	12